

**FUSIBILI 5x20F TIPO STANDARD****Caratteristiche generali:**


- Fusibili miniatura;
- Dimensioni: 5 x 20 mm;
- Caratteristica d'intervento: rapido (F);
- Conformi alle norme: CEI 32-6/1, CEI 32-6/2, IEC 60127-1, IEC 60127-2;
- Corpo in vetro;
- Contatti in rame argentato;
- Corrente nominale: da 100mA a 25A;
- Tensione nominale: 250V AC / 48V DC;
- Temperatura operativa: -40°C / +100°C;
- Altitudine massima: 2000 metri s.l.m.;
- Umidità relativa: < 50% a 40°C;
- Confezione minima: 10 pezzi;

**Foto del prodotto / Product image****STANDARD TYPE 5x20F FUSES****General characteristics:**

- Miniature fuses;
- Dimensions: 5 x 20 mm;
- Time-current characteristic: fast (F);
- Conform to standards: CEI 32-6/1, CEI 32-6/2, IEC 60127-1, IEC 60127-2;
- Glass body;
- Silver plated contacts;
- Rated current: from 100mA to 25A;
- Rated voltage: 250V AC / 48V DC;
- Operating temperature: -40°C / +100°C;
- Max altitude: 2000 mt. above sea level;
- Relative humidity: < 50% at 40°C;
- Minimum packaging: 10 pieces;

**Disegno / Drawing**

(dimensioni in mm) / (dimensions in mm)

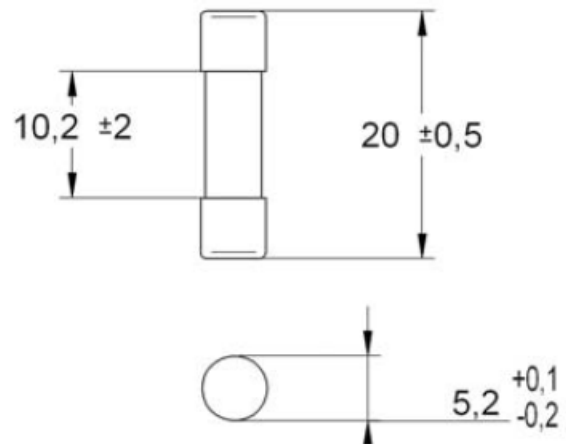

Pagine totali del documento: 4

Document total pages: 4

Ultimo aggiornamento: 12 ottobre 2018

Last updated: 12th October 2018

**Codici per l'ordinazione:****Ordering codes:**


standard	I <sub>n</sub> (A)	V <sub>n</sub> (V)	I <sub>k</sub> (A) / 250V	I <sub>k</sub> (A) / 125V	Conf.
					pack.
0100100	100mA	250V	35	1500	10-100
0100125	125mA	250V	35	1500	10-100
0100160	160mA	250V	35	1500	10-100
0100200	200mA	250V	35	1500	10-100
0100250	250mA	250V	35	1500	10-100
0100315	315mA	250V	35	1500	10-100
0100400	400mA	250V	35	1500	10-100
0100500	500mA	250V	35	1500	10-100
0100630	630mA	250V	35	1500	10-100
0100800	800mA	250V	35	1500	10-100
0101001	1A	250V	35	1500	10-100
0101251	1,25A	250V	35	1500	10-100
0101601	1,6A	250V	35	1500	10-100
0102002	2A	250V	35	1500	10-100
0102502	2,5A	250V	35	1500	10-100
0103153	3,15A	250V	35	1500	10-100
0104004	4A	250V	40	1500	10-100
0104005	5A	250V	50	1500	10-100
0104306	6,3A	250V	63	1500	10-100
0105008	8A	250V	80	1500	10-100
0105010	10A	250V	100	1500	10-100
0105012	12A	250V	120	1500	10-100
0105015	15A	250V	150	1500	10-100
0105016	16A	250V	160	1500	10-100
0105020	20A	250V	200	1500	10-100
0105025	25A	250V	250	1500	10-100

I<sub>n</sub> = Corrente nominale / Rated currentV<sub>n</sub> = Tensione nominale / Rated voltageI<sub>k</sub> = Potere di interruzione / Breaking capacity



**Curve caratteristiche tempo / corrente:**

***Time / current characteristic curves:***

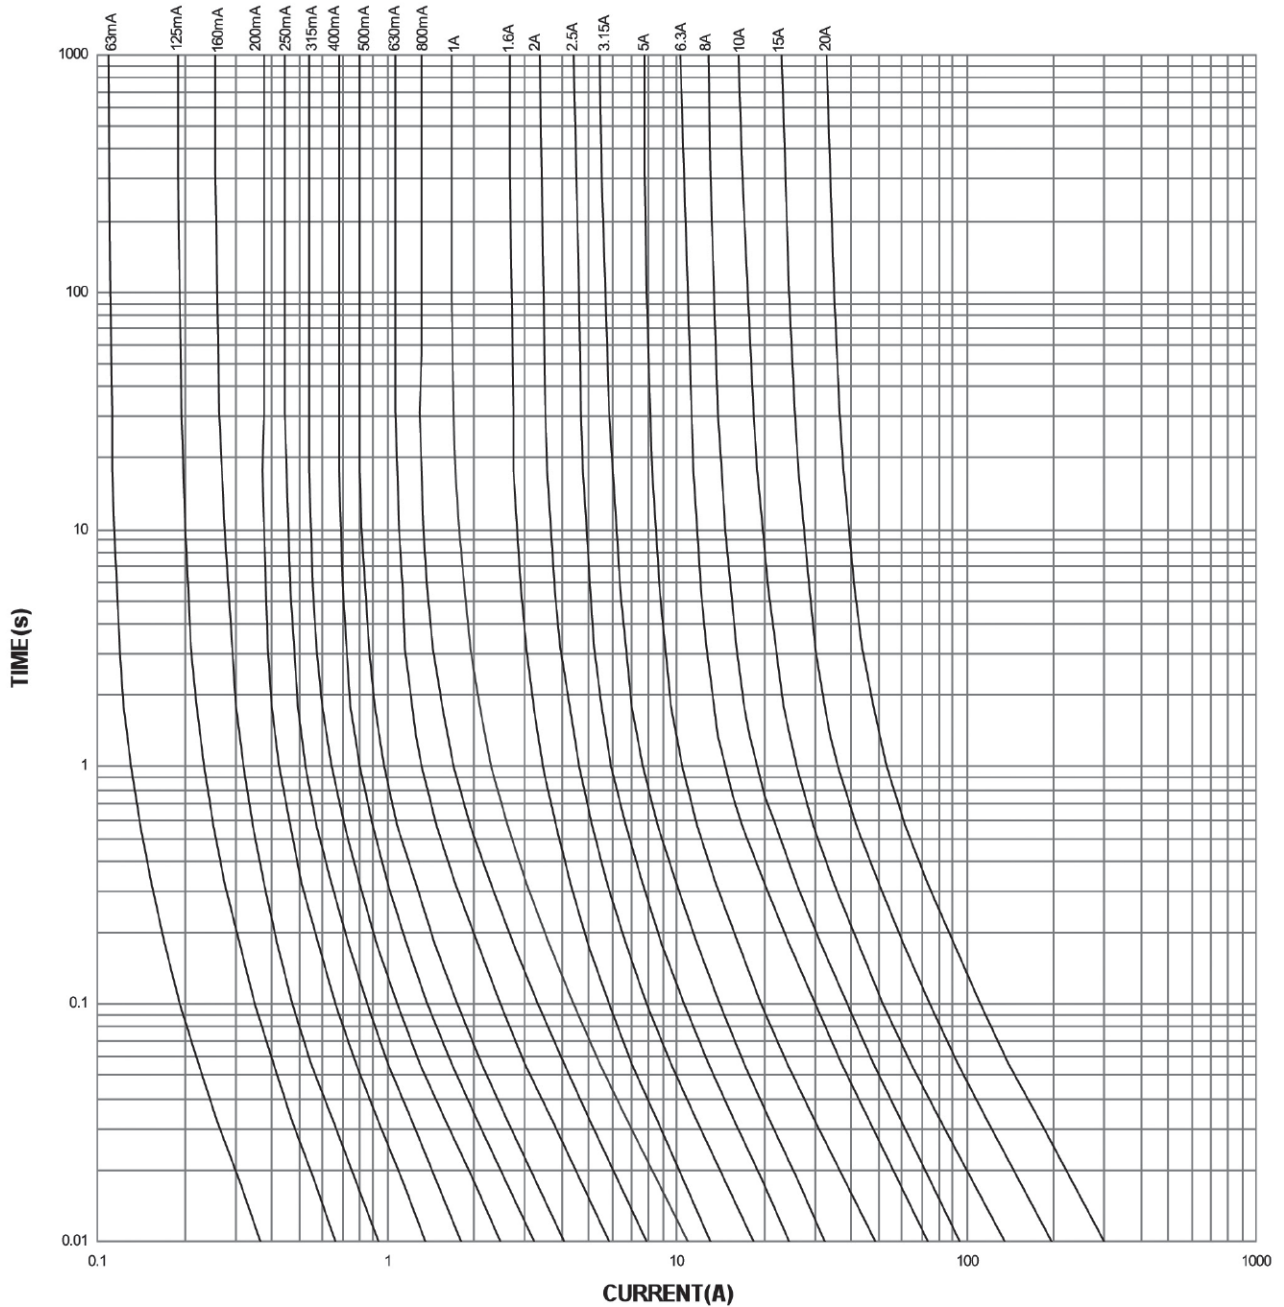

**Resistenze:****Resistance values:**

<b>Corrente nominale / Rated current</b>	<b>Resistenze / Resistance values</b>
100mA	4,9 $\Omega$ $\pm$ 40%
200mA	2.79 $\Omega$ $\pm$ 40%
250mA	2.4 $\Omega$ $\pm$ 40%
300mA	1.76 $\Omega$ $\pm$ 40%
315mA	1.53 $\Omega$ $\pm$ 40%
400mA	1.027 $\Omega$ $\pm$ 40%
500mA	0.686 $\Omega$ $\pm$ 40%
630mA	0.491 $\Omega$ $\pm$ 40%
800mA	0.269 $\Omega$ $\pm$ 40%
1A	0.262 $\Omega$ $\pm$ 40%
1.25A	0.175 $\Omega$ $\pm$ 40%
1.6A	0.0553 $\Omega$ $\pm$ 40%
2A	0.039 $\Omega$ $\pm$ 40%
2.5A	0.0323 $\Omega$ $\pm$ 40%
3.15A	0.023 $\Omega$ $\pm$ 40%
4A	0.0211 $\Omega$ $\pm$ 40%
5A	0.0154 $\Omega$ $\pm$ 40%
6.3A	0.01 $\Omega$ $\pm$ 40%
8A	0.00849 $\Omega$ $\pm$ 40%
10A	0.00679 $\Omega$ $\pm$ 40%
12A	0.00569 $\Omega$ $\pm$ 40%
15A	0.00479 $\Omega$ $\pm$ 40%
16A	0.00445 $\Omega$ $\pm$ 40%
20A	0.00375 $\Omega$ $\pm$ 40%
25A	0.00284 $\Omega$ $\pm$ 40%

**ITALWEBER S.p.A**

Sede unica: Via E. Fermi 40/42 - 20057 Assago (MI) - Italy  
 Telefono +39 02 93977.1 - Telefax +39 02 93904565  
 E-MAIL: info@italweber.it - info@pec.italweber.it

Capitale Sociale i.v. Euro 655.200,00  
 C.C.I.A.A. Milano N. 565572  
 Trib. Milano Reg.Soc.108694, Vol. 2869  
 C.F.-P.IVA 00737760157

