

**FUSIBILI 5x20T TIPO STANDARD****Caratteristiche generali:**


- Fusibili miniatura;
- Dimensioni: 5 x 20 mm;
- Caratteristica d'intervento: ritardato (T);
- Conformi alle norme: CEI 32-6/1, CEI 32-6/2, IEC 60127-1, IEC 60127-2;
- Corpo in vetro;
- Contatti in rame argentato;
- Corrente nominale: da 32mA a 25A;
- Tensione nominale: 250V AC / 48V DC;
- Temperatura operativa: -40°C / +100°C;
- Altitudine massima: 2000 metri s.l.m.;
- Umidità relativa: < 50% a 40°C;
- Confezione minima: 10 pezzi;

Foto del prodotto / Product image**STANDARD TYPE 5x20T FUSES****General characteristics:**

- Miniature fuses;
- Dimensions: 5 x 20 mm;
- Fusion characteristic: time-delay (T);
- Conform to standards: CEI 32-6/1, CEI 32-6/2, IEC 60127-1, IEC 60127-2;
- Glass body;
- Silver plated contacts;
- Rated current: from 32mA to 25A;
- Rated voltage: 250V AC / 48V DC;
- Operating temperature: -40°C / +100°C;
- Max altitude: 2000 mt. above sea level;
- Relative humidity: < 50% at 40°C;
- Minimum packaging: 10 pieces;

Disegno / Drawing

(dimensioni in mm) / (dimensions in mm)

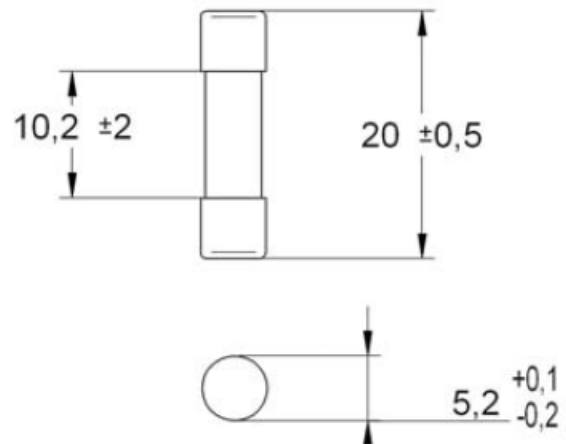


Pagine totali del documento: 4

Document total pages: 4

Ultimo aggiornamento: 12 ottobre 2018

Last updated: 12th October 2018

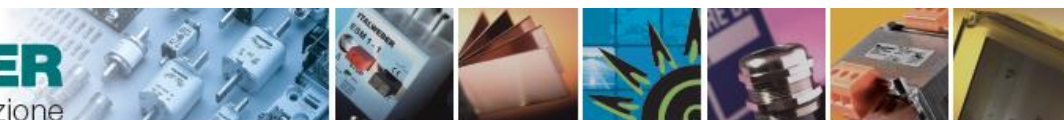

Codici per l'ordinazione:


Ordering codes:


standard standard	I_n (A)	V_n (V)	I_k (A) a 250V	I_k (A) a 125V	I^2t totale (A ² s)	conf. pack.
0110032	32mA	250V	35	1500	-	10-100
0110040	40mA	250V	35	1500	-	10-100
0110050	50mA	250V	35	1500	-	10-100
0110063	63mA	250V	35	1500	-	10-100
0110080	80mA	250V	35	1500	-	10-100
0110100	100mA	250V	35	1500	0,032	10-100
0110125	125mA	250V	35	1500	0,051	10-100
0110160	160mA	250V	35	1500	0,087	10-100
0110200	200mA	250V	35	1500	0,173	10-100
0110250	250mA	250V	35	1500	0,391	10-100
0110315	315mA	250V	35	1500	0,493	10-100
0110400	400mA	250V	35	1500	0,807	10-100
0110500	500mA	250V	35	1500	1,38	10-100
0110630	630mA	250V	35	1500	1,60	10-100
0110800	800mA	250V	35	1500	3,06	10-100
0111001	1A	250V	35	1500	5,36	10-100
0111251	1,25A	250V	35	1500	5,88	10-100
0111601	1,6A	250V	35	1500	6,89	10-100
0112002	2A	250V	35	1500	13,3	10-100
0112502	2,5A	250V	35	1500	21,6	10-100
0113153	3,15A	250V	35	1500	37,9	10-100
0114004	4A	250V	40	1500	75,6	10-100
0114005	5A	250V	50	1500	113,7	10-100
0114306	6,3A	250V	63	1500	192,8	10-100
0115008	8A	250V	80	1500	324,9	10-100
0115010	10A	250V	100	1500	593,4	10-100
0115012	12A	250V	120	1500	998,9	10-100
0115015	15A	250V	150	1500	1768	10-100
0115016	16A	250V	160	1500	2331	10-100
0115020	20A	250V	200	1500	3110	10-100
0115025	25A	250V	250	1500	4550	10-100



Curve caratteristiche tempo / corrente:

Time / current characteristic curves:

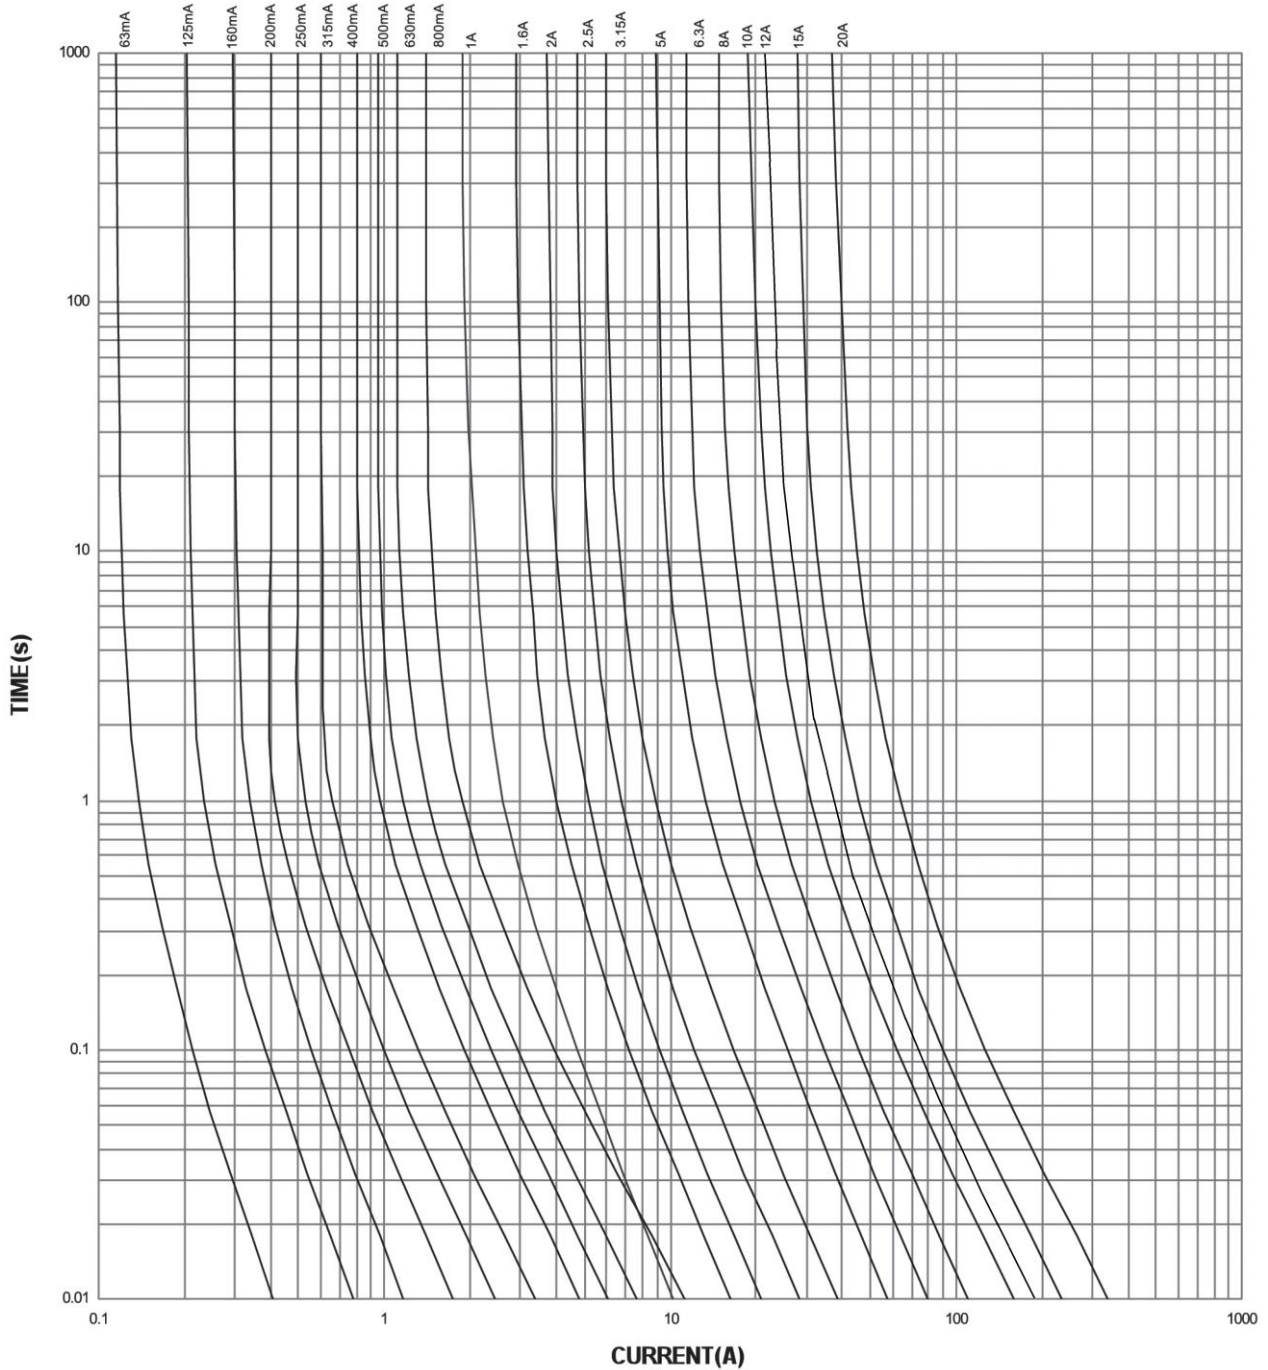



Potenze dissipate:

Power dissipation:

Rated Current	Maximum Power dissipation (W)	Rated Current	Maximum Power dissipation (W)	Rated Current	Maximum Power dissipation (W)
100mA	0,266	700mA	0,481	6A	1,411
125mA	0,298	800mA	0,502	6.3A	1,462
150mA	0,292	1A	0,517	7A	1,669
160mA	0,320	1.25A	0,528	8A	1,728
200mA	0,305	1.5A	0,538	9A	1,916
250mA	0,322	1.6A	0,545	10A	2,133
300mA	0,337	2A	0,553	12A	3,302
315mA	0,340	2.5A	0,614	15A	3,494
350mA	0,350	3A	0,734		
400mA	0,364	3.15A	0,784		
500mA	0,405	3.5A	0,886		
600mA	0,432	4A	1,069		
630mA	0,444	5A	1,157		