


D-Light

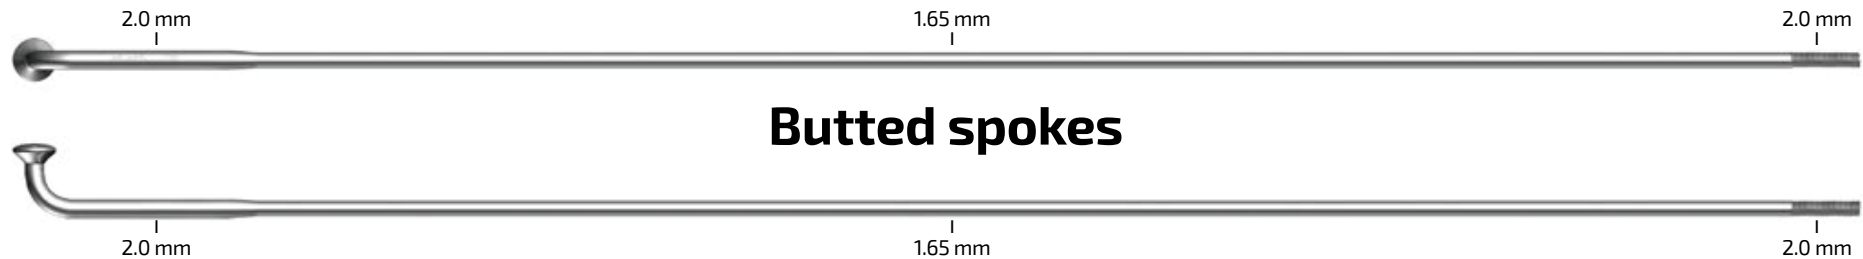

The short 2 mm section of the D-Light reduces weight especially on the threaded side. The 2 mm section starts just at the beginning of the thread. Therefore, the rotating masses at the end of the spoke are especially reduced. This brings benefits to both the acceleration and braking qualities of the wheel. The use of 14G nipples offers a wide variety of combinations. The middle section is increased to 1,65mm, which makes the spoke much stiffer and brings less torsion during truing than a 1,5 mm middle section. This results in an easier building process of the wheels.

Designed for top quality MTB wheels with:

- Maximum strength
- Minimum weight
- Disc brake approval

Diameter: 2.0 - 1.65 - 2.0 (short butted)

Length: 145-310 mm

Weight: 307 g (64 x 260 mm)

Strength on middle section: 1370 N/mm²